





# Batting Cage Net #11 Outdoor Installation Instructions

119-lb., 191 lb. (One-Year Guarantee) and 381-lb. (Two-Year Guarantee) Breaking-Strength Knotted-Nylon Twine • Available in Dark Green Only

**1.** Once you assemble them, the end sections will look like this. Insert a short hanging-loop assembly into each of three pre-drilled crossbar holes.

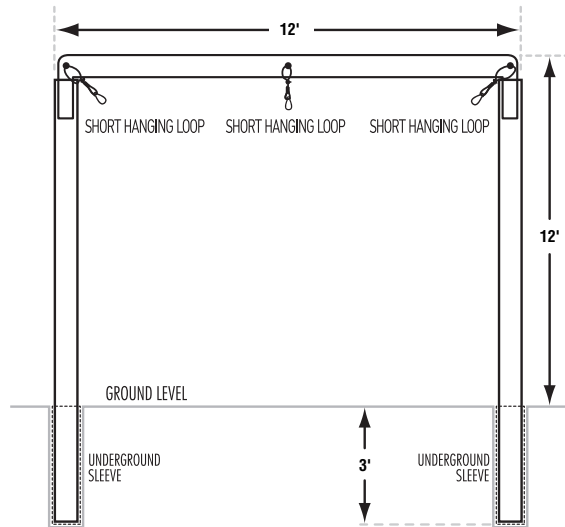


**2.** Once you assemble it, the middle section will look like this. Insert a short hanging-loop assembly into the middle pre-drilled crossbar hole and long hanging-loop assemblies into both outside pre-drilled crossbar holes.

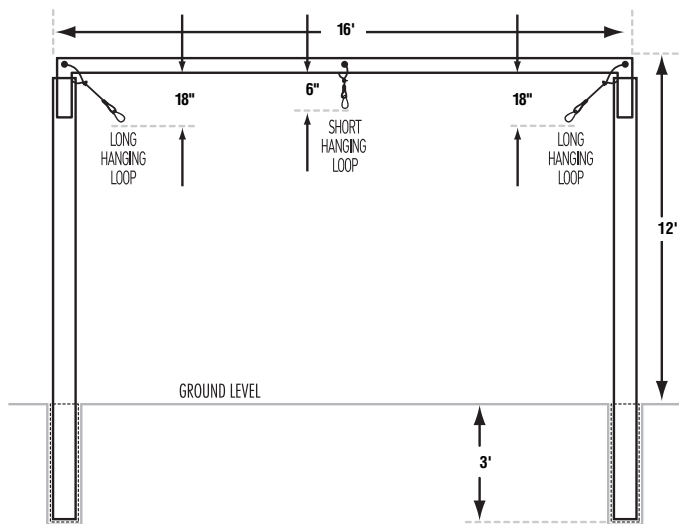


NOTE: Drawings are not to scale.


**3.** OVERHEAD VIEW OF WHERE TO DIG HOLES FOR THE GROUND SLEEVES.

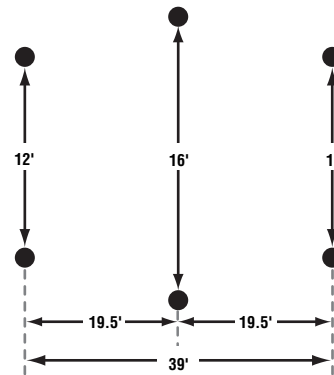

**4.** SIDE VIEW OF THE THREE U-SHAPED SECTIONS COMPLETELY SET UP.

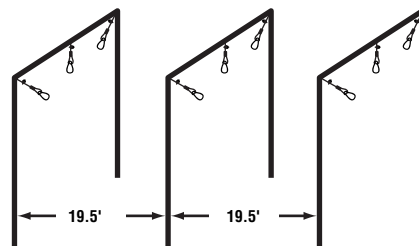

**5.** SIDE VIEW OF NET COMPLETELY SET UP

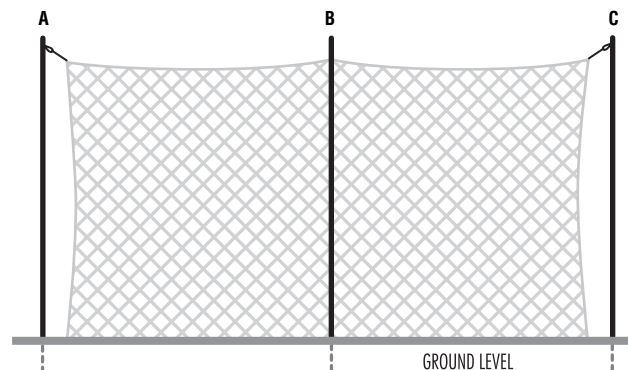

Ropes attach to the hanging-loop assemblies on crossbars A, B, and C.

## HOW TO SET UP YOUR JUGS OUTDOOR FRAME

1. Check contents to make sure you have all needed parts.

### Tubing:

- Six - 1<sup>7</sup>/<sub>8</sub>" x 17'-long galvanized tubing
- Six - 2<sup>3</sup>/<sub>8</sub>" x 3'-long galvanized tubing (ground sleeves)
- Two - 1<sup>5</sup>/<sub>8</sub>" x 12'-long galvanized tubing
- One - 1<sup>5</sup>/<sub>8</sub>" x 16'-long galvanized tubing

### Hanging-Loop Assemblies:

- Nine - hanging-loop assemblies (Two long hanging-loop assemblies and Seven short hanging-loop assemblies)

2. Dig holes and secure the 3' sleeves into the ground. Use concrete to secure your 3' sleeves into the ground.

3. **End Sections:** Insert a **short** hanging-loop assembly into each of three pre-drilled crossbar holes and secure all with cable clamps.

**Middle Section:** Insert a **short** hanging-loop assembly into the middle pre-drilled crossbar hole and **long** hanging-loop assemblies into both outside pre-drilled crossbar holes and secure all with cable clamps.

4. Slide the middle 16' crossbars into the uprights and fit into the sleeves.

5. Slide the end 12' crossbars into the uprights and fit into sleeves.

You are now ready to attach your netting to the frame.

## HOW TO ATTACH YOUR JUGS NET TO THE FRAME

1. Lay your net out under the frame sections. Stretch it out completely from one end to the other.

2. Pick up the net by the nylon rope and attach it to the middle frame section with the hanging-loop assemblies.

3. After hanging the net on the middle frame section, making sure that it does not sag more than 1-2', pull the ropes towards the end frames to stretch it out. Attach each rope to the end frame sections with the corresponding hanging-loop assemblies. **See Figure 1.**

4. Walk completely around the net, pulling and helping the net to stretch into shape.

The net will condense inside the box and will need a little help getting back into shape.

We at JUGS recommend hanging your batting cage net with a minimum of 18" of netting on the ground. This will provide you with enough net and weight to prevent balls from slipping out underneath the sides and ends of the net.

You should not stake the net down or put any type of weight on the net to hold it down. This would cause the net to prematurely wear out because the net would not be allowed to "give" and absorb the batted balls.

**Remember:** For safety purposes, your net should be at least 2' away from all poles or hard surfaces. That way, none of the batted balls can bounce back and injure someone.

## HOW TO ATTACH YOUR HANGING LOOPS TO THE CROSSBARS

1. At each pre-drilled hole on the crossbar, hold the clamp and hanging-loop assembly with one hand and thread the cable through the pre-drilled hole with your other hand.

2. Wrap the cable around the crossbar and thread it back down into the cable clamp.

3. Slide the cable clamp up on the cable and tighten it, leaving one inch of cable hanging below. **See Figure 2.**

**CUSTOM NETTING** of all shapes and sizes now available, including: Batting Cage Nets, Backstops, Trapezoid Backstops, Outfield and Foul Ball Netting.


There are 3 Ways for you to get more information and FREE estimates on JUGS Custom Netting:

1. **Call** JUGS at 1-800-547-6843 and ask for a Net Specialist.

2. **FAX** your specifications to a Net Specialist at 503-691-1100.


3. **E-mail** your specifications to [jims@jugssports.com](mailto:jims@jugssports.com).

**Figure 1**  
Close-up view of the hanging-loop assemblies attached to end sections.

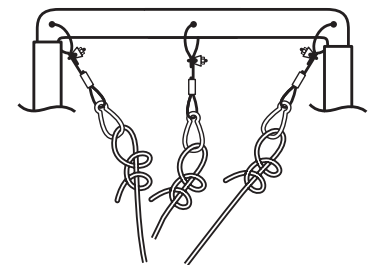

We recommend using a **TWO HALF-HITCH KNOT** when attaching the net ropes to the hanging-loop assemblies.

**Figure 2**  
Close-up view of the hanging-loop assemblies attached to middle section.

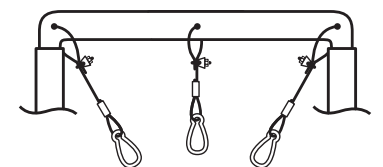

**WARNING:**

Do not leave your net and frame up during extreme weather conditions (high wind, snow), as non-warranty damage may occur.

[www.jugssports.com](http://www.jugssports.com)

JUGS Batting Cage Nets with 381 lb. or 691 lb. Breaking-Strength High-Tenacity Nylon Filaments are guaranteed for two (2) years against defects in material or workmanship. JUGS Batting Cage Nets with 119 lb. or 191 lb. Breaking-Strength High-Tenacity Nylon Filaments have a one (1) year guarantee against defects in material or workmanship. All JUGS Batting Cage Frames are guaranteed for five (5) years unless damaged by snow, ice or other acts of God. Commercial use of JUGS Batting Cage Nets or JUGS Batting Cage Frames automatically limits this warranty to thirty (30) days after date of shipment.

From  
factory to You  
in LESS THAN 2  
WEEKS