




Batting Cage Net #6 Outdoor Installation Instructions

191 lb. (One-Year Guarantee) and 381-lb. (Two-Year Guarantee) Breaking-Strength Knotted-Nylon Twine Only • Available in Dark Green Only


1. Here is a drawing of how your frame will look before you hang up your net.

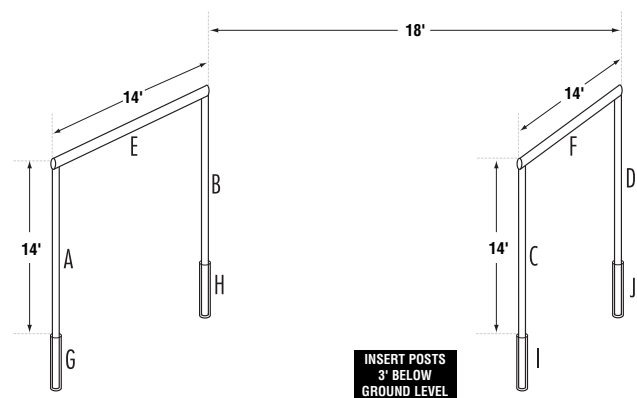


2. Here is a list of the type of tubing and how many of each you will need to install your JUGS Batting Cage Net:

- Four 1⁷/₈ galvanized tubing – 17' – A, B, C, and D in drawing.
- Four 2³/₈ galvanized tubing – 3' long – G, H, I, and J. These are underground “sleeves.”
- Two 1⁵/₈ galvanized tubing – 14' long – E and F. These are crossbars.


3. TOP VIEW OF TUBING INSTALLATION

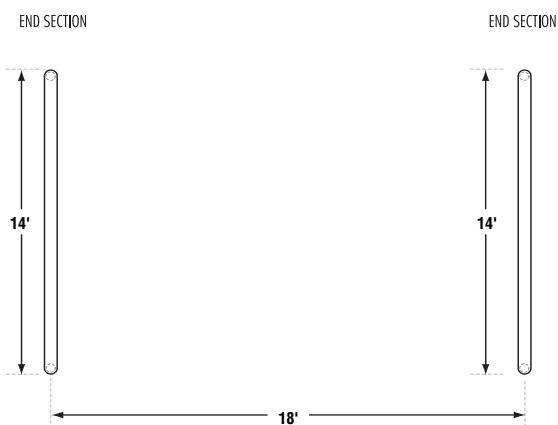


4. FRONT VIEW OF EACH SECTION

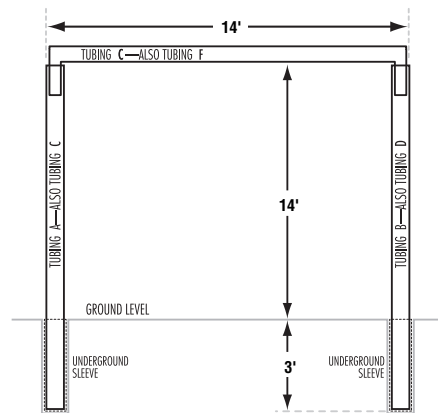


5. DETAILS OF CROSSBARS

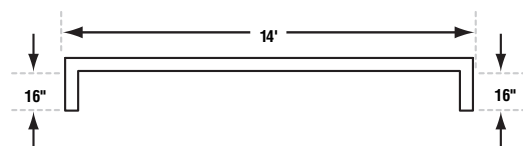

6. OVERHEAD VIEW OF NET IN PLACE

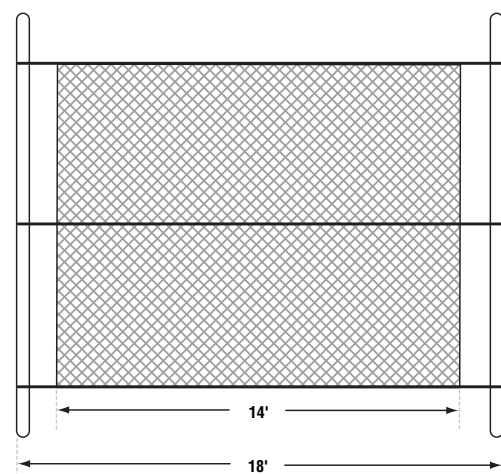


7. OVERHEAD VIEW OF NET IN PLACE

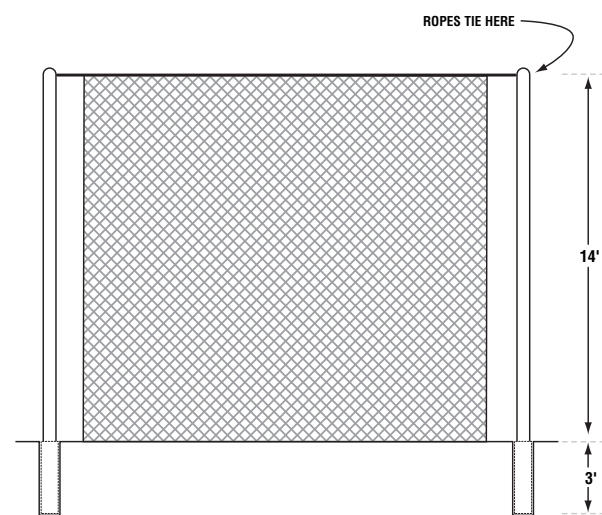

8. END VIEW OF NET IN PLACE

Here is a “batter’s view” of this JUGS Batting Cage Net. (No poles are shown to avoid confusion.)

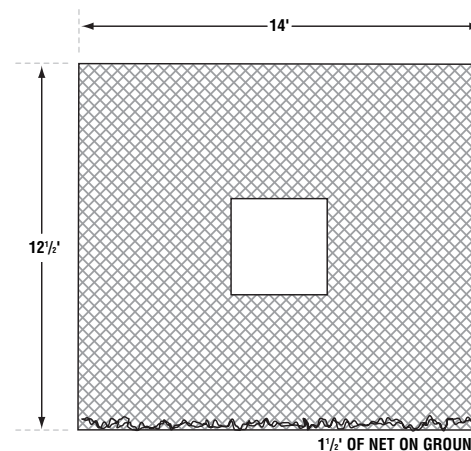

NOTE: Drawings are not to scale.

HOW TO SET UP YOUR JUGS OUTDOOR FRAME

1. Check contents to make sure you have all needed parts (see Step #2).
2. Dig holes and secure the 3' sleeves into the ground. Use concrete to secure your 3' sleeves into the ground.
3. Slide the crossbars into the uprights and fit into the sleeves.
4. Repeat step 3 for other crossbar.

You are now ready to attach your netting to the frame.

HOW TO ATTACH YOUR JUGS NET TO THE FRAME

1. Lay your net out under the frame sections. Stretch it out completely from one end to the other.
2. Tie rope ends to one frame section. Keep a distance of 4' between the end of the batting cage net and the frame section.
3. Pull net towards opposite frame section and tie off in same manner.
4. Walk completely around the net, pulling and helping the net to stretch into shape. The net will condense inside the box and will need a little help getting back into shape.

We at JUGS recommend hanging your batting cage net with a minimum of 18' of netting on the ground. This will provide you with enough net and weight to prevent balls from slipping out underneath the sides and ends of the net.

You should not stake the net down or put any type of weight on the net to hold it down. This will cause the net to prematurely wear out because the net would not be allowed to “give” and absorb the batted balls.

Remember: For safety purposes, your net should be at least 2' away from all poles or hard surfaces. That way, none of the batted balls can bounce back and injure someone.

CUSTOM NETTING of all shapes and sizes now available, including: Batting Cage Nets, Backstops, Trapezoid Backstops, Outfield and Foul Ball Netting.

There are 3 Ways for you to get more information and FREE estimates on JUGS Custom Netting:

1. Call JUGS at 1-800-547-6843 and ask for a Net Specialist.
2. FAX your specifications to a Net Specialist at 503-691-1100.
3. E-mail your specifications to jims@jugssports.com.

From factory to You in LESS THAN 2 WEEKS

WARNING: Do not leave your net and frame up during extreme weather conditions (high wind, snow), as non-warranty damage may occur.

www.jugssports.com

JUGS Batting Cage Nets with 381 lb. or 691 lb. Breaking-Strength High-Tenacity Nylon Filaments are guaranteed for two (2) years against defects in material or workmanship. JUGS Batting Cage Nets with 119 lb. or 191 lb. Breaking-Strength High-Tenacity Nylon Filaments have a one (1) year guarantee against defects in material or workmanship. All JUGS Batting Cage Frames are guaranteed for five (5) years unless damaged by snow, ice or other acts of God. Commercial use of JUGS Batting Cage Nets or JUGS Batting Cage Frames automatically limits this warranty to thirty (30) days after date of shipment.