


- C.** Snap the 3-way fitting on the longer side of the middle section onto the single upright piece.



## Step 4: Top Section

- A.** Snap together the pieces of the top section.

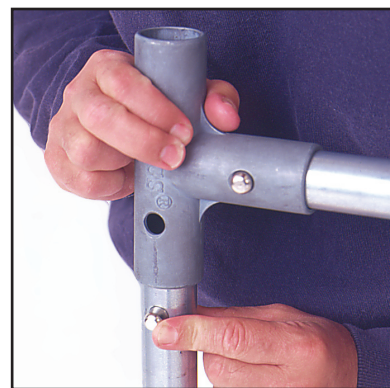

- B.** Connect the top section to the 3-way fittings on the middle section, making sure the lock buttons on the bars of the top section are facing the same direction as the holes in the bars of the middle section. The frame of your **JUGS Quick-Snap®** L-Shaped Screen is now complete.



## Step 5: Netting

- A.** After completing the frame assembly, carefully tilt the frame forward and lay it on the ground.
- B.** Then, stretch the netting out across the ground with the open end just touching the top of the frame.
- C.** Stand in the center of the frame and begin pulling the netting onto the tubing, alternating sides as you go.



- D.** Finally, stand your screen back up. Your **JUGS Quick-Snap®** Screen is now complete.



If you need more information about this product or any other JUGS product or service, please contact the manufacturer:



In the USA and Canada, call toll-free:  
1-800-547-6843.

For International Orders, call collect:  
0-503-692-1635.

Our fax number is  
1-503-691-1100.

Visit our website at  
[www.jugssports.com](http://www.jugssports.com).

Se habla español.

© 2008 JUGS Sports  
CSLSPSI-0808

# ASSEMBLY INSTRUCTIONS



**QUICK-SNAP®**

## L-Shaped Protective Screens



**SAVE THESE INSTRUCTIONS**

## ⚠ WARNING

**– READ NOW –**  
This protective screen may not provide protection from batted or pitched balls which have rebounded or ricocheted off the pitching machine, this screen, or other structures.


**THE MACHINE OPERATOR, PITCHER, BATTER, OR FIELDER MUST REMAIN ALERT AT ALL TIMES.**

The machine operator must wear a batting helmet and eye protection while operating the machine. Failure to heed this warning may result in serious injury or death.

# JUGS Quick-Snap® L-Shaped Screen

## Assembly Instructions

Take the frame sections and netting from your bag and separate them. Then follow these five easy steps.

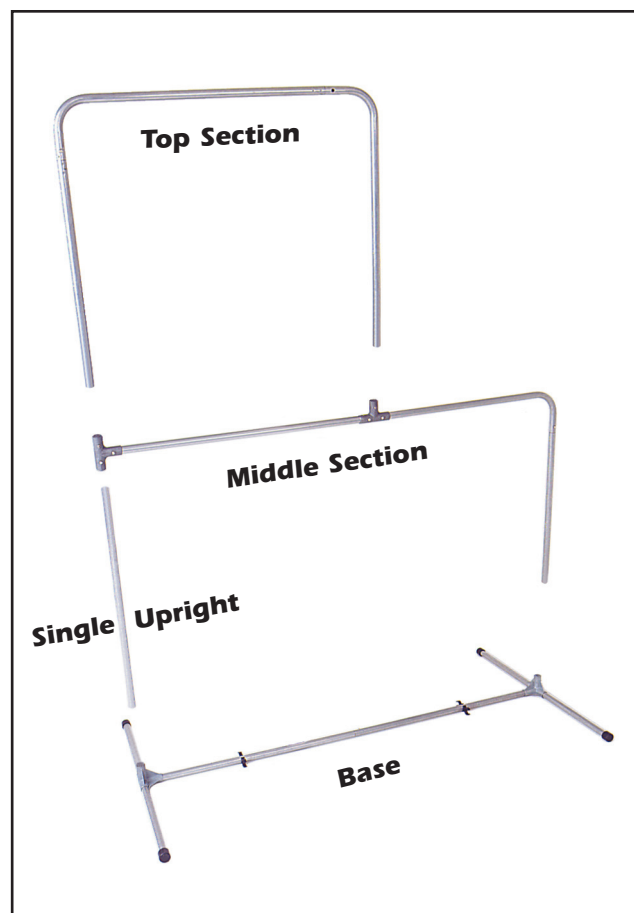

## Step 1: Base


- A.** Snap the two feet on one end of the base into its 4-way fitting.



- B.** Do the same with the two feet on the other end of the base.



- C.** Snap the two long parts of the base together, making sure the lock button is secure in the hole.

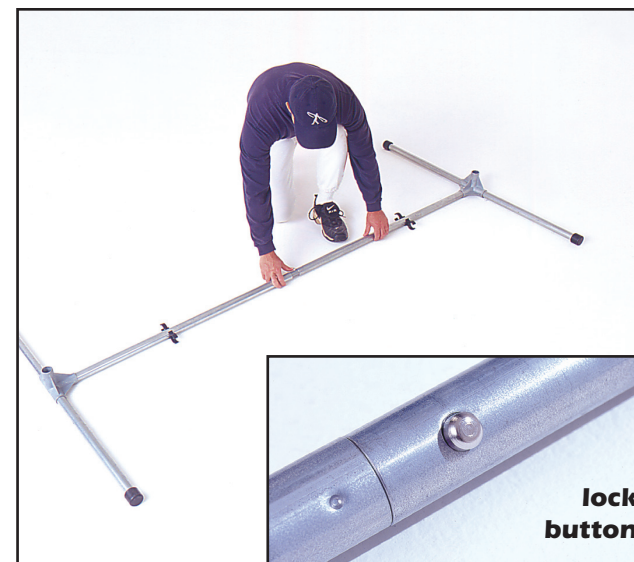

## Step 2: Single Upright

- A.** Snap the single upright piece into either one of the two 4-way fittings on the base.



## Step 3: Middle Section

- A.** Snap the pieces of the middle section together.



- B.** Snap the shorter bar—upright—into the other 4-way fitting on the base.

