



The frame of your **JUGS** Quick-Snap® Protective Screen is now complete.

Step 3: Netting

- A.** After completing the frame assembly, carefully tilt the frame forward and lay it on the ground.
- B.** Then, stretch the netting out across the ground, with the open end just touching the top of the frame.
- C.** Stand in the center of the frame and begin pulling the netting onto the tubing, alternating sides as you go.



- D.** Stand your screen back up. Your **JUGS** Quick-Snap® Screen is now complete.

If you need more information about this product or any other JUGS product or service, please contact the manufacturer:



In the USA and Canada, call toll-free: 1-800-547-6843.

For International Orders, call collect: 0-503-692-1635.

Our fax number is 1-503-691-1100.

Visit our website at www.jugssports.com.


Se habla español.

© 2008 JUGS Sports
QSSSI-0808

ASSEMBLY INSTRUCTIONS



QUICK-SNAP®

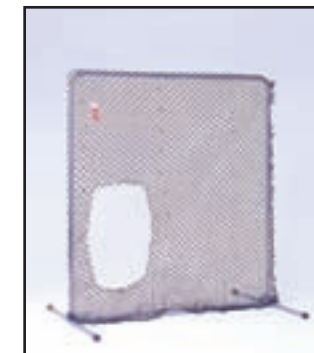

Softball Screen



Baseman Screen



Seven-Footer® Square Screen



Seven-Footer® Square Screen with Sock-Net™

SAVE THESE INSTRUCTIONS

⚠ WARNING

- READ NOW -
This protective screen may not provide protection from batted or pitched balls which have rebounded or ricocheted off the pitching machine, this screen, or other structures.


THE MACHINE OPERATOR, PITCHER, BATTER, OR FIELDER MUST REMAIN ALERT AT ALL TIMES.

The machine operator must wear a batting helmet and eye protection while operating the machine. Failure to heed this warning may result in serious injury or death.

JUGS Quick-Snap® Protective Screen

Assembly Instructions

Take the frame sections and netting from your bag and separate them. Then follow these three easy steps.

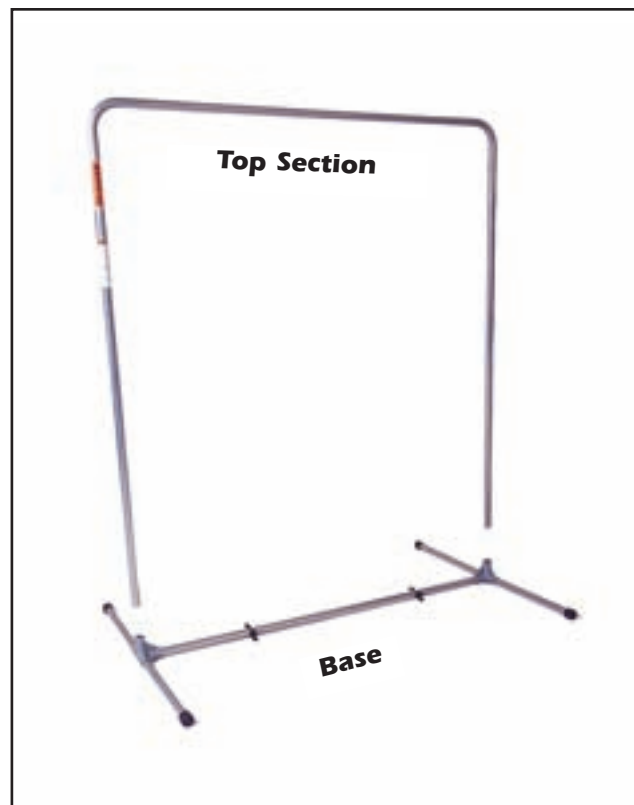

Step 1: Base

A. Snap the two legs on one end of the base into its 4-way fitting.



B. Do the same with the two legs on the other end of the base.



C. Snap the two long parts of the base together, making sure the lock button is secure in the hole.



Step 2: Top Section

A. Snap together the six pieces of the top section.



B. Connect the top section to the two 4-way fittings on the base, making sure the lock buttons are secure.

