




# **PROTECTOR™ BLUE SERIES SHORT TOSS® SCREEN (S3006)**

## **ASSEMBLY INSTRUCTIONS**

1. Assemble frame as shown below using carriage bolts and nuts (see **Frame Assembly Example** below). Note that the legs should touch the ground at the tip of the legs if installed correctly (see **Leg Assembly Example** below.)
2. Using Padding illustration, attach all padded sections to locations shown. Note: Pad seams should all be on inside edge of frame (padding reference numbers are located on the inside of the padding vinyl cover.)
3. Stretch netting out, on the ground, in the same shape as the frame. Stand at the center of the frame and begin feeding the net onto the frame, like a pillowcase, alternating sides as you go until the netting reaches the bottom of the frame. Once net is installed over frame, pull (2) drawstrings tight and around leg piping and tie to secure net at bottom.

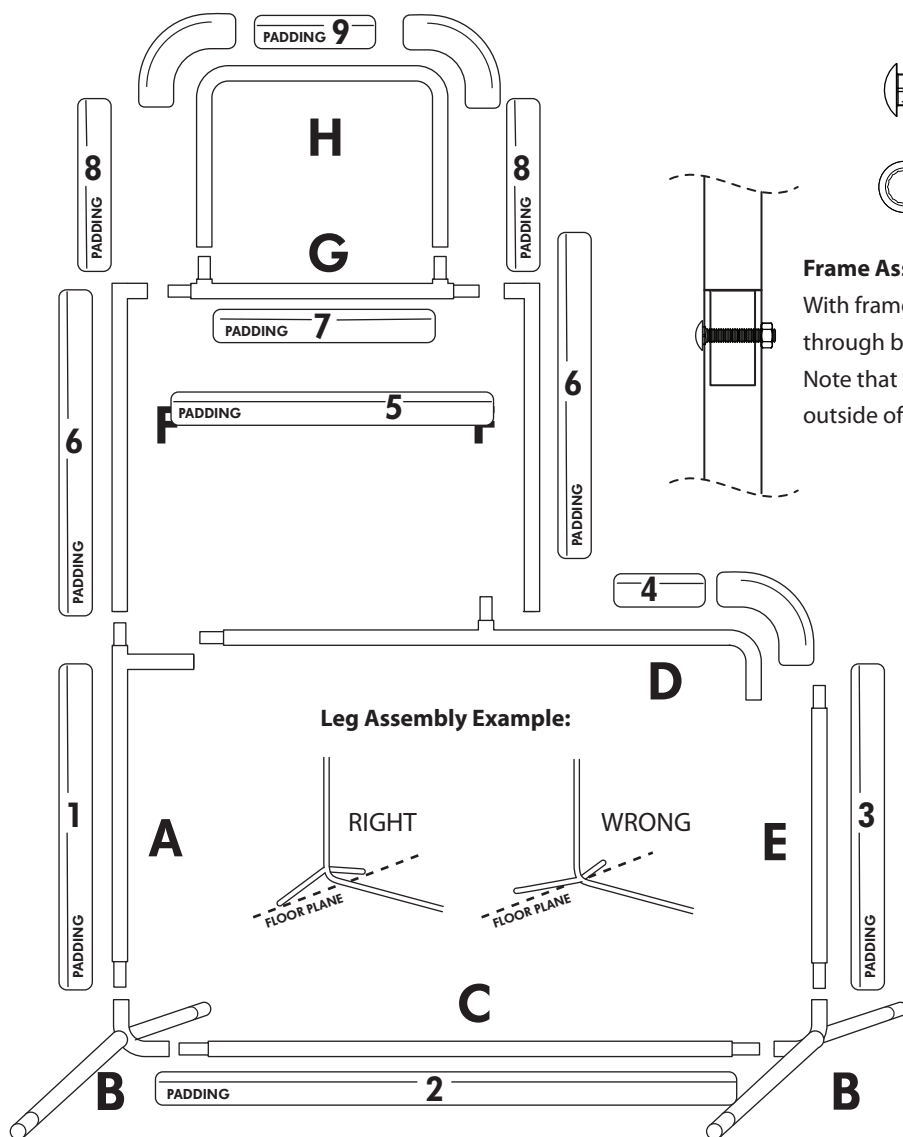

(10) 1/2-inch Carriage Bolts and Nuts




(1) 1/2-inch Wrench

### **Frame Assembly Example:**

With frame section slid together, insert carriage bolt through both pipe sections and tighten nut until snug. Note that the carriage bolt always enters from the outside of the frame and nuts always go on the inside.

### **Overhead Assembly Side View**



Overhead assembly can be adjusted for both right- or left-handed use by depressing the snap button and rotating top over to the other side. Snap button on other side should engage when in correct position.

• JUGS Sports guarantees JUGS Protector™ Blue Series netting and frame for (1) year unless damaged by snow, ice or other acts of God.

If you have any questions regarding this screen, contact JUGS Sports. USA and Canada, call toll free: 1-800-547-6843.

International orders, call collect: 0-503-692-1635. Our fax number is 503-691-1100. Or, visit our website at [jugssports.com](http://jugssports.com)